



# TERRAFORCE®

The original, reversible, hollow core retaining block

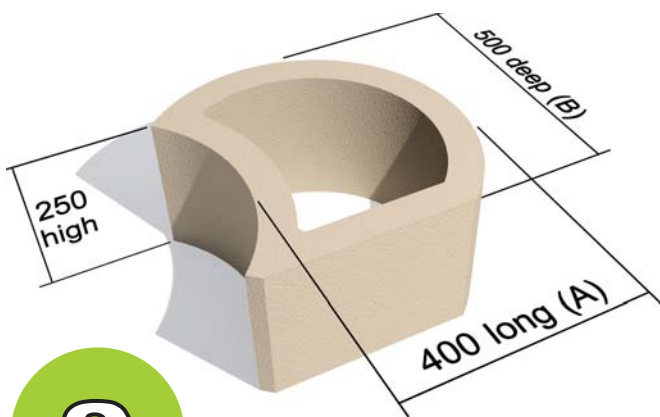


S STANDARD

For variations check with your local supplier.

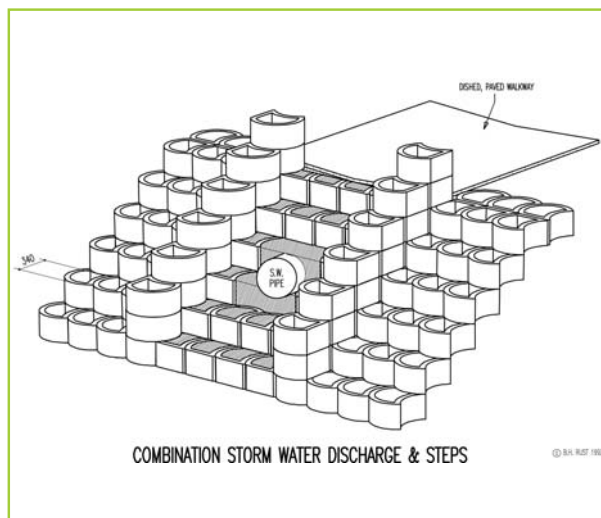

Block	S
Blocks/m <sup>2</sup> (Measured vertically)	10
Block mass/kg	43
Block infill volume/ m <sup>3</sup>	0.024
Average constructed mass kg per m <sup>2</sup> of wall	800
Block wall thickness mm	50

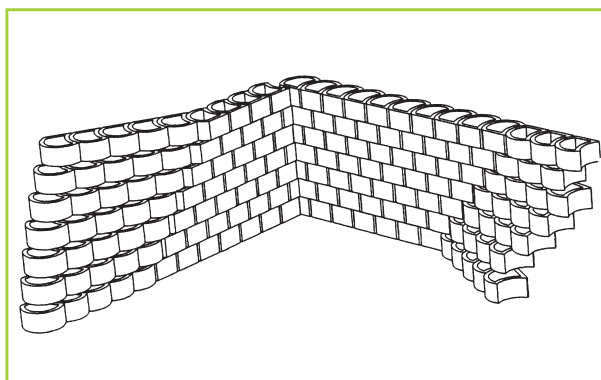

## MASS GRAVITY RETAINING WALL


BLOCKS FILLED WITH INTERLOCKING COARSE GRAVEL OR TOPSOIL AS SPECIFIED

OPTIONAL VERTICAL INTERLOCKING KEY WHEN SOIL INFILL SPECIFIED


DRAINAGE LAYER AND PIPE

DOUBLE BLOCK FOR EXTRA MASS


FOUNDATION TO SPECIFICATION




OPTIONAL R.C INFILL




LIGHT GRAVITY WALL



MASS GRAVITY WALL



COMPOSITE STRUCTURE



VERTICAL R.C. FILLED WALL