


TERRAFORCE®

The original, reversible, hollow core retaining block



DECORWALL BLOCK

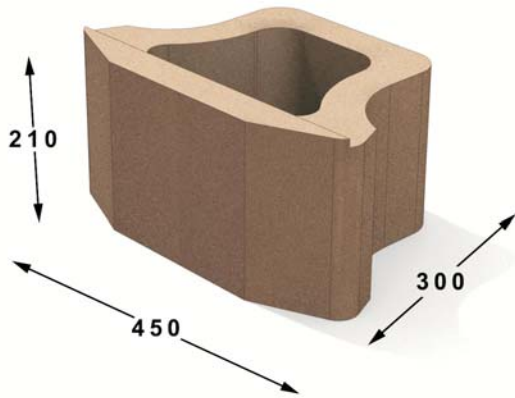

Specialist retaining wall contractors & civil work

Main Road, Klipmuts,
Western Cape, South Africa
PO Box 36, Klipmuts 7625

Tel: 021 875 5155
Fax: 021 875 5170
Email: walls@decorton.co.za
www.decorton.co.za

With Mechanical Vertical Interlock

Block	Decorwall
Blocks/m ² (Measured vertically)	10.5
Block mass/kg (Average)	27
Block infill volume/m ³	0.011
Block wall thickness mm	50
Ave. constr. mass kg per m² of wall. Single Skin	
When filled with topsoil of 1500kg/m ³	488
When filled with gravel of 1900kg/m ³	538
When filled with concrete of 2400 kg/m ³	604



ECONOMICAL RETAINING SOLUTION




TERRAFORCE®

The original, reversible, hollow core retaining block



DECORWALL BLOCK

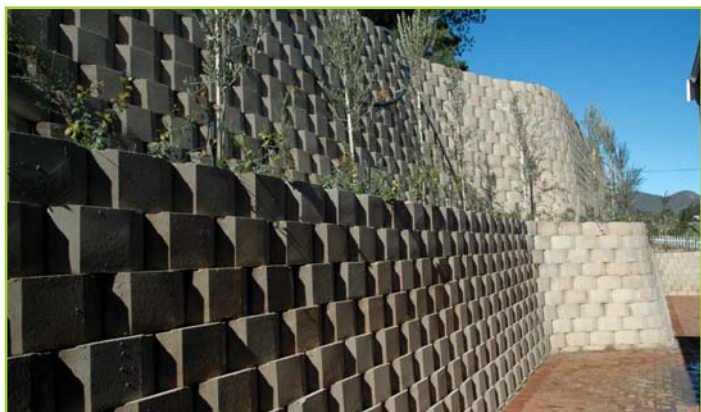

MEANDERING TERRACES / COMPOSITE WALLS



STEPS INCORPORATED WITH EASE



TILTED FOUNDATION FOR EXTRA STABILITY



CURVES AND FEATURES CAN BE INCLUDED



STORM WATER MANAGEMENT AT NEW DEVELOPMENT



THE INLET PIPE THAT COLLECTS ALL THE WATER